

# MARINE LEASH®

Manufactured By APC GROUP, INC.

The Marine Leash is the only 10-80Ft. 12 / 14-gauge 20 Amp. All-weather watertight -57°F to 200°F retractable power cord reel designed for marinas, docks, boats, and ships. The Marine Leash can either mount on the dock and pull to the boat or mounted on the boat and used on board for retractable power using the boat's internal 125 VAC power at sea or at port.

## POWER WITH A SINGLE PULL

### The Marine Leash will withstand the harshest conditions


1. The Marine Leash is the *only outdoor watertight* cord reel flexible to -57 (select models).
2. Conforms to UL listings I363A, UL 355, UL 94-VO, Certified to CSA C22.2 Std No. 308, CSA 6.8.2, CSA 6.4
3. Available in various lengths, gauges, and plug configurations rated 125 VCA.
4. Lighted plugs and receptacles in 5-15P and 5-20R plugs.
5. Produced with 12, 14, and 16 gauge with an internal 20 /15 amp. Breaker @125 VAC.
6. Custom cord reel solutions and special builds as well, OEMs welcomed.
7. The Marina-mounted units are non-ratcheting and move in and out with the movement of the boat.
8. Three-year warranty parts, including shipping

### New Marine Leash Watertight 80Ft. 20 amp.



### Marine leash can be ordered with Polar Cord flexible to -57°F


The 55Ft., 70Ft., and 80Ft units come with swivel brackets and required installation hardware.

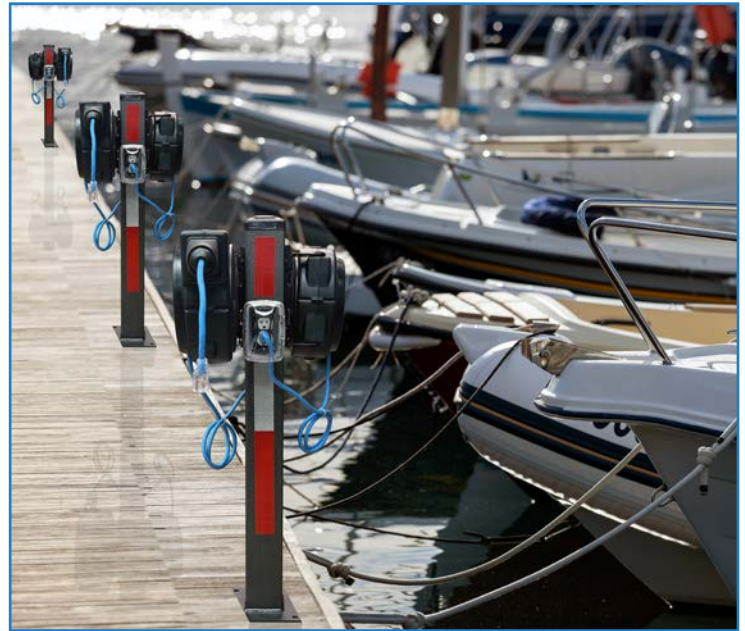

New 12 Gauge 55ft. And 70ft. 20Amp. Breaker. Includes Lighted plugs and swivel mount bracket included with Hardware.



Marine Leash 80Ft. 14 Gauge at Channel Island Marina.

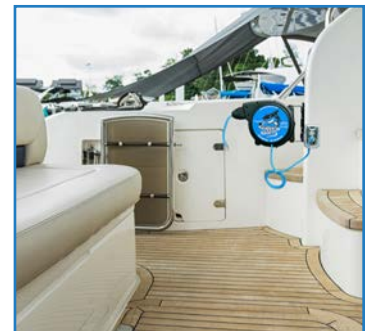

70 Ft. 12-gauge 20amp. Mounted on a Freighter used for Maintenance.

### THE MARINE LEASH PROVIDES MANY BENEFITS FOR USE IN MANY DIFFERENT ENVIRONMENTS



## INSTALLATION MOUNTING BRACKETS



**MLP-40** Pedestal Supports 1-4 Reels, includes Bracket, Watertight Outlets / Receptacles, Reflective Tape, and Mounting Hardware.




**MLCB** Ceiling Bracket used to mount to ceiling or wall.




**MLMP** Mounting Plate used to mount to Wall, Pole, or Post.

## CORD REEL SPECIFICATIONS

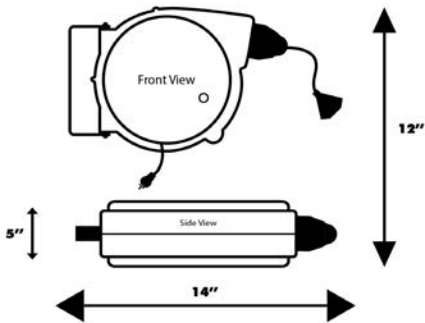

Large cord reels provide 55 - 80 feet in 12 or 14 gauge, with a 20 amp breaker, includes swivel bracket, and flexible to -57°F to 200°F.

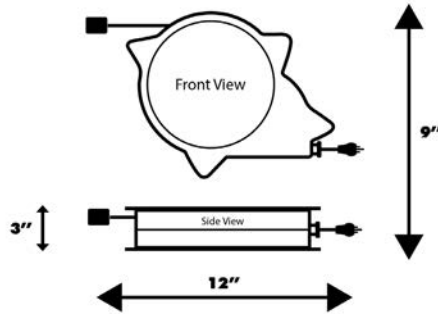

Small cord reel provides 10 - 40 feet in 12, 14, and 16 gauge with 20, 15, and 13 amp breakers, flexible to -57° F to 200° F. Requires additional mounting brackets sold separately.

Samples are available upon request for evaluations at no charge.




## PRODUCT TESTING & FEATURES




CONFORMS TO UL LISTINGS 1363-A, 60601, 355, CSA C22.2 std. No. 308


The Marine Leash is the perfect solution for charging your electric motors and E Drive batteries for pontoon boats on man-made community lakes.

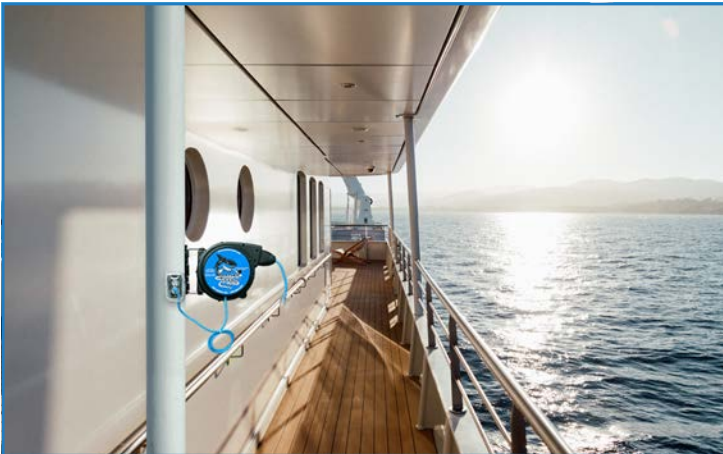

# PRODUCT SPECIFICATIONS

Unit Type	Model Number	Length	Breaker Amp	Gauge	Retractable End	Non-Retracting End	Ship Weight	
 <p>All models include swivel bracket.</p>	ML-502012-T	50	20	12	Female-Tri-Tip	Male	17lbs.	
	ML552012F	55	20	12	Female	Male	17lbs.	
	ML702012F	70	20	12	Female	Male	21lbs.	
	ML802014F	80	20	14	Female	Male	23lbs.	

Unit Type	Model Number	Length	Breaker Amp	Gauge	Retractable End	Non-Retracting End	Ship Weight	
 <p>Mounting brackets sold separately</p>	ML202012-F	20	20	12	Female	Male	10lbs.	
	ML302014-F	30	20	14	Female	Male	11lbs.	
	ML401516-F	40	15	16	Female	Male	12lbs.	
	ML202012-T	20	20	12	Female-Tri-Tip	Male	10lbs.	

Pedestals & Brackets	Model #		Shipping Weight
	MLP-40-2	40" pedestals, powder coated hammer black, supports two cord reels. Includes two watertight outlets, mounting brackets, hardware, and reflective tape.	22 lbs.
	MLP-40-4	40" pedestals, powder coated hammer black, supports four cord reels. Includes four watertight outlets, mounting brackets, hardware, and reflective tape.	24 lbs.
	MLMP	Mounting plate for small reel, mounts to wall, pole, and post.	2 lbs.
	MLLB	License plate bracket for small reels. Fits all vehicles and trucks. Comes with bracket, mounting hardware, and decorative license plate frame.	4 lbs.
	MLCB	Ceiling bracket for small reels.	2 lbs.




 CONFORMS TO UL LISTINGS 1363-A, 60601, 355, CSA C22.2 std. No. 308

**APC GROUP INC.**  
 219 S. William Dillard  
 Building. 4  
 Gilbert AZ 85233



Visit [marineleash.com](http://marineleash.com)  
 for additional information